

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) Publication number:

**0 486 089 A2**

(12)

**EUROPEAN PATENT APPLICATION**(21) Application number: **91202858.6**(51) Int. Cl.<sup>5</sup>: **H04B 7/26, H04Q 7/04,  
H04M 1/72**(22) Date of filing: **05.11.91**(30) Priority: **14.11.90 GB 9024711**(43) Date of publication of application:  
**20.05.92 Bulletin 92/21**(84) Designated Contracting States:  
**DE ES FR GB IT**(71) Applicant: **PHILIPS ELECTRONICS UK LIMITED**  
**Philips House 1-19 Torrington Place**  
**London WC1E 7HD(GB)**(84) **GB**(71) Applicant: **N.V. Philips' Gloeilampenfabrieken**  
**Groenewoudseweg 1**  
**NL-5621 BA Eindhoven(NL)**(84) **DE ES FR IT**(72) Inventor: **Pudney, Christopher David, c/o**  
**Vodafone Limited**  
**Canal House, Hambridge Road**  
**Newbury, Berkshire RG14 5XF(GB)**  
Inventor: **Davey, Mark Peter, c/o AT&T**  
**Swindon Road**  
**Malmesbury, Wiltshire SN16 9NA(GB)**(74) Representative: **Moody, Colin James et al**  
**PHILIPS ELECTRONICS Patents and Trade**  
**Marks Department Philips House 1-19**  
**Torrington Place**  
**London WC1E 7HD(GB)**(54) **A method of operating a radio communications system, a radio communication system and a secondary station for use in the system.**

(57) In a TDMA cordless telephone system, such as DECT, an out of lock secondary station scans all the physical channels in the respective carrier channels in order to find a system onto which it can lock. In order to expedite the scanning of the channels, the secondary station adopts a scanning sequence in which during each scan of the sequence consecutive physical channels located in non-adjacent carrier channels are scanned. Because of spill over from transmissions in the non-scanned channels it is possible to determine in what channels there are transmissions thereby possibly enabling the secondary channel to lock sooner thus saving battery power.

In a modification of the scan, the signal strength in the respective physical channels may be monitored for a fraction of the duration of the physical channel.

**EP 0 486 089 A2**

The present invention relates to a method of operating a communications system in which secondary stations are able to roam in and out of radio coverage area of one or more fixedly sited primary stations, such stations regularly transmitting idle beacon signals which are detectable by in range secondary stations.

The present invention also relates to such a communications system and to a secondary station for use in the communications system.

For convenience of description the present invention will be described with reference to DECT (Digital European Cordless Telecommunications) system which comprises a plurality of time division duplex frequency channels which are accessed using a time division multiple access (TDMA) protocol. More particularly DECT comprises, for voice communication, one or more geographically separated primary or fixed base stations each having radio transceiving means defining a cell and a land line connection to the PSTN, and one or more secondary or transportable, for example hand portable, stations having radio transceiving means which are able to communicate by way of a radio link with an in-range primary station. The European Telecommunications Standards Institute (ETSI) currently proposes that DECT shall have ten radio carrier channels but this number may be increased later if there is sufficient demand. Each radio channel is divided into frames of 10 milliseconds duration and each frame is divided into 24 equal time slots (or physical channels) which comprise 12 time division duplex (TDD) channels termed duplex voice channels. The TDD arrangement is such that the  $n$ th and the  $(n+12)$ th time slots, where  $n$  is an integer between 1 and 12, are the forward and reverse physical channels constituting the duplex voice channel. Each pair of physical channels is capable of carrying one duplex digitised speech conversation or data at a rate of 32 kbits/sec. As the framing structure in the radio carrier channels is synchronised, this means that the correspondingly numbered physical channels in each of the radio carrier channels coincide in time.

In setting up a voice call between a primary and a secondary station, a duplex voice channel is assigned to the transaction. The assignment of the duplex voice channel in any of the radio carrier channels is by the method of dynamic channel allocation whereby a secondary station taking into account its radio environment as determined by monitoring the average interference in each of the 120 pairs of physical channels negotiates with the primary station for access to the best duplex voice channel currently available under the control of the primary station.

Currently the DECT specification requires base stations to continue transmissions on their last active forward physical channel to provide the system functions of broadcasting the basic system information, base station identity, and a frequency and frame timing reference. For convenience of description such transmissions will be called "normal idle beacon" transmissions.

A secondary station when locked to a system remains in synchronism with the framing structure of the primary station but can be powered down or "sleep" for relatively long periods. However the secondary station is woken-up for the occurrence of the primary station's active forward physical channel in one frame (10 mS) in every 16 frames (or 160 mS) in order to be capable of receiving any paging transmissions addressed to it. By having such an arrangement for the reception of possible paging signals, the secondary station has a duty cycle of the order of 1 in 384 which is effective in reducing the power consumption. However, since the secondary station need be active for only a portion of the physical channel in order to receive any paging message, a duty cycle of 1 in 2000 can be achieved with this arrangement.

In the case of a secondary station which is out-of-lock, it wakes up approximately every 200 seconds and tries to detect a system onto which it can lock by scanning all the carrier channels in succession, each carrier channel being monitored for the duration of one frame which in the case of 10 carrier channels will take 100mS. Such a search of the carrier channels not only upsets the duty cycle of the secondary station which if there are no paging messages is of the order of 1 in 2000 for a locked secondary station but also reduces its battery life.

An object of the present invention is to make scanning of the carrier channels more efficient.

According to one aspect of the present invention there is provided a method of operating a communications system which comprises a primary station and a plurality of secondary stations, communication between the primary and secondary stations being in accordance with a time division multiplex protocol in which each of a plurality of carrier channels is divided into time frames and each frame is divided into a plurality of physical channels, wherein an out of lock secondary station is powered up to scan periodically the physical channels in each carrier channel in order to detect those physical channels in which transmissions are taking place, characterised in that the scanning sequence of the secondary station is controlled so that during any one scan of the sequence consecutive physical channels which are located in non-adjacent carrier channels are scanned.

According to a second aspect of the present invention there is provided a communications system comprising a primary station and a plurality of secondary stations, communication between the primary and secondary stations being in accordance with a time division multiplex protocol in which each of a plurality of carrier channels is divided into time frames and each frame is divided into a plurality of physical channels, wherein an out of lock secondary station is powered up to scan periodically the physical channels in each carrier channel in order to detect those physical channels in which transmissions are taking place, characterised in that the secondary station comprises control means for controlling the scanning sequence so that during any one scan of the sequence consecutive physical channels which are located in non-adjacent carrier channels are scanned.

According to a third aspect of the present invention there is provided a secondary station for use in the system in accordance with the second aspect of the present invention, the secondary station comprising transmitting and receiving means, control means for controlling the transmitting and receiving means, said control means being responsive to the secondary station being out of lock to initiate scanning of all the available physical channels in the respective carrier channels, characterised in that the scanning sequence is controlled so that during any one scan of the sequence consecutive physical channels which are located in non-adjacent carrier channels are scanned.

The invention is based on the fact that the characteristics of a transmitted signal enable its presence in an adjacent carrier channel to be determined when carrying out an earlier scanning sequence. As a result a channel scanning protocol can be devised which enables some but not all the carrier channels to be scanned at any one time but in so doing derives a good indication of the presence of a transmitting primary station not only in the channel being scanned but also in channels adjacent to those being scanned.

If desired the respective scanning sequences are all the odd numbered channels and then all the even numbered channels.

These sequences may be further subdivided into four scan sequences comprising, respectively, the forward transmissions in the odd numbered carrier channels, the forward transmissions in the even numbered carrier channels, the reverse transmissions in the odd numbered channels and the reverse transmissions in the even numbered channels. Other variations are possible.

In one embodiment each physical channel is examined for substantially its whole duration. However an alternative method is to monitor the signal

strength for a fraction, for example one eighth, of the period of each physical channel. Such a fraction may be say 50 $\mu$ s out of 416 $\mu$ s. However care must be taken to ensure that said fraction does not occur during a guard space.

In a development of the system, each primary station transmits a system identity code which may be used by a secondary station to obtain information about its neighbouring systems, which information is stored. When an out of range secondary station detects a neighbouring system, it anticipates that it is approaching its own local system and as a consequence it may increase its frequency of scan so that it is able to initiate a call within the guaranteed maximum connection time of 1.5 seconds specified by most telephone authorities.

The present invention will now be described, by way of example, with reference to the accompanying drawings, wherein:

Figure 1 illustrates diagrammatically a digital cordless telephone system,

Figure 2 is a diagram showing the DECT frame structure imposed on ten carrier channels,

Figure 3 is a diagram of the structure of a DECT physical channel,

Figure 4 shows diagrammatically the amplitude (A) versus frequency (F) mask of the transmitter output and in chain-dot lines a typical receiver filter characteristic,

Figure 5 is a diagram of amplitude (A) versus time (T) illustrating signals picked up in four physical channels,

Figure 6 is a block schematic diagram of a secondary station, and

Figure 7 is a flow chart illustrating one embodiment of the method in accordance with the present invention.

The digital cordless telephone system shown in Figure 1 comprises a plurality of primary or fixed base stations PS of which four, PS1, PS2, PS3 and PS4, are shown. Each of the primary stations is connected by way of a respective wideband land-line link 10, 11, 12 and 13, capable of carrying digitised speech or data at a rate of say 1.152Mbits/sec. to cordless telephone system controllers 14 and 15. The system controllers 14 and 15 are, in the illustrated embodiment, connected to the PSTN.

The system further comprises a large plurality of transportable, for example hand portable, secondary stations SS1 to SS6 which in the illustrated embodiment are used for digital time division duplex speech communication. Duplex communication between the secondary stations within an area covered by a system controller and/or the PSTN is

by way of radio through the primary stations PS. Accordingly the primary and secondary stations each comprise a radio transmitter and receiver.

Figure 2 shows ten carrier channels C1 to C10, each carrier channel is divided in the time domain into 10ms frames. Each frame is divided into 24 time slots or physical channels of which the first twelve F1 to F12 are allocated for transmission in a forward direction, that is from a primary station to a secondary station, and the second twelve R1 to R12 are allocated for transmission in the reverse direction. The forward and reverse physical channels are twinned, that is, the correspondingly numbered forward and reverse physical channels, for example F4, R4, comprise a twin which hereinafter will be referred to as a duplex voice channel. In DECT there are 120 duplex voice channels altogether. In setting-up a call between a primary and a secondary station, a duplex voice channel is assigned to the transaction. The assignment of the duplex voice channel in any of the carrier channels C1 to C10 is by the method of dynamic channel allocation whereby a secondary station taking account of its radio environment negotiates with the primary station for access to the best duplex voice channel currently available under the control of the primary station.

The general format of a signal in a physical channel is shown in Figure 3. The format comprises a header and a synchronisation sequence 16, signalling data 18 (which may include paging information) and digitised speech 20. An interslot guard space 22 is also provided at the end of the message. The digitisation rate is 32kbits/sec. Both the primary and secondary stations include a buffer to compress the speech digitised at 32kbits/sec. into bursts of data at 1.152Mbits/sec. so that it is suitable for transmission.

The basic protocol for a transmission which is to be initiated by a secondary station SS is for it to listen to all the reverse physical channels in each of the carrier channels and ascertain which reverse physical channels are busy and idle and the relative signal quality in these reverse physical channels and from the information derived the secondary station determines what it believes is the best duplex voice channel and transmits in its reverse physical channel to a particular primary station PS. The signalling data 18 in the message together with other details in the initial transmission are decoded and passed to the system controller 14 or 15 which sets-up the fixed network connection. The primary station confirms that the particular duplex voice channel has been assigned to the transaction.

In the forward direction, the primary stations send paging messages to the addressed secondary stations in one physical channel of say every

sixteenth frame. Such an arrangement enables the secondary stations to "sleep" during at least the intervening fifteen frames thereby economising on power. An addressed secondary station in response to a paging request addressed to it will, unless a duplex voice channel has been assigned, search through all the carrier channels and transmit on the reverse physical channel of the best duplex voice channel.

Also during idle periods the primary station is required by the DECT system specification to continue transmissions in the forward physical channel of its last active duplex voice channel in what will be termed its normal idle beacon mode. The information transmitted includes basic system information including the base station identity and frequency and frame timing reference. Such system information is required by a secondary station when wishing to initiate a call.

An idle secondary station when not locked to a particular cordless telephone system is woken up periodically and will scan all the carrier channels by tuning to each carrier channel for the duration of a frame and determining the presence of idle beacon signals or other signals in the respective physical channels and their quality. In the case of 10 carrier channels a full scan will take 100mS and if a duty cycle of 1 in 2000, which is approximately that of the locked secondary station when sleeping, is maintained then a full scan is repeated once every 200 seconds. In certain situations this may be unacceptably long.

In accordance with the method of the present invention a partial scan is repeated more frequently than a single full scan and because of the spill over of an idle beacon signal into adjacent carrier channels it is possible for the secondary station to determine by the presence of a signal, albeit at a low level, if there is an idle beacon signal being transmitted in a physical channel of an unscanned adjacent carrier channel.

Figure 4 illustrates diagrammatically the frequency mask of a transmission in a carrier channel C2 and its spill over into the adjacent channels C1, C3. The characteristic of a typical receiver filter is shown in chain-dot lines. These relaxed transmitter and receiver filter specifications enable the method in accordance with the present invention to be implemented simply. Thus a receiver listening on an adjacent carrier channel, say channel C1, cannot reject completely all the signal transmitted in the adjacent carrier channel. In the DECT specification the adjacent channel attenuation has a relatively low value of the order of 28dB. However DECT is expected to operate in an environment where the signal strength can vary by as much as 20dB over very short distances. Hence to maintain a call, a secondary station normally requires a

signal 20dB greater than the minimum, say typically 40dB, for adequate reception. Thus adjacent channel interference is received at about the same range as that which allows a system to be usable.

Figure 5 illustrates diagrammatically a situation in which a weak idle beacon signal is received from a distant primary station transmitting in a physical channel PC1, a strong idle beacon signal is received from a nearby primary station transmitting in a physical channel PC2, there is no signal in a physical channel PC3 and a spill over signal from an adjacent carrier channel is received in a physical channel PC4, which would otherwise have no signal in it.

Thus if an idle secondary station scans non-adjacent carrier channels, for example all the odd-numbered channels, it can build up a channel map detailing in which physical channels there is no usable system present. Such a scan can be completed in half the time of a full scan. However since the search is less accurate than a full scan, then a second scan is made later, say 100 seconds later, of those carrier channels, for example the even-numbered channels, not covered by the previous scan. If however the secondary station has been able to lock onto a permitted system found to be acceptable in the first scan, then it does not need to execute the second scan thereby saving battery power.

In a first variant on the method just described, the scanning of the non-adjacent carrier channels is shortened further by say scanning only the forward physical channels in say the odd numbered carrier channels, then the forward physical channels in the even numbered carrier channels, then the reverse physical channels in the odd numbered carrier channels and finally the reverse physical channels in the even numbered carrier channels. There is a delay of say 50 seconds between successive scans in the scanning sequence.

In a second variant of the methods described, instead of a secondary station monitoring the physical channels for substantially their entire duration of 416 $\mu$ S, a received signal strength indication is taken over a fraction, say 50 $\mu$ S, of the duration of a physical channel. Such sampling of the physical channels is shown diagrammatically in broken lines in Figure 5. The length of the sampling period has to be such as to guarantee that it will not take place in the guard space 22 (Figure 3) due to the fact that the idle secondary station is not synchronised with the framing structure of the primary stations. In a modification of this method there could be 2 or more shorter sampling periods per physical channel.

Figure 6 is a block schematic diagram of a secondary station SS suitable for use in the method and system in accordance with the present

invention. The secondary station SS comprises a transmitter 24 connected to an antenna 26 which is also connected to a receiver 28. A digital filter 30 is included in the received signal circuit to distinguish a digitised speech signal from other data signals.

A microphone 31 is connected to a CODEC 32 which includes storage for the digitised speech. The CODEC 32 operates at 32kbts/sec. The CODEC 32 is connected to a data compressor 34 which compresses the digitised speech into bursts having a data rate of the speech at 1.152Mbts/sec. A control element 35 is provided which controls the operation and internal organisation of the secondary station and which has a store 36 connected to it for storing amongst other things details of the usage and quality of all the duplex voice channels. At the occurrence of a reverse time slot or physical channel in the best available duplex voice channel, as decided by the control element 35, a burst of compressed digitised speech is then relayed by way of a change-over switch 33 to the transmitter 24 whose carrier channel has been predetermined by the control element 35 applying control signals to a local oscillator 25 as part of the choice of the best available duplex voice channel.

The received digitised speech in the forward time slot or physical channel is relayed by way of a change-over switch 37 to the data compressor/expander 34 in which it is expanded to digitised speech having a data rate of 32kbts/sec. and passed to the CODEC 30 and then to a loud-speaker or other audio transducer 38.

A keypad 40 is connected to the control element 35, for keying-in data such as a called party's telephone number. The control element 35 causes the keyed-in data to be displayed on a display device 42. The control element 38 also adds the necessary signalling to the keyed-in data which is conveyed by way of a change-over switch 44 to the transmitter 24.

The switches 33, 37 and 44 are controlled by the control element 35.

Assuming that the secondary station is operating in a normal idle beacon mode, at least its transmitter 24 and receiver 28 are powered down. At least the receiver is woken up by instructions generated by the control element 35 to listen for paging signals for up to 417 $\mu$ S every 160mS.

However if the secondary is not locked to a system it will scan all the carrier channels in accordance with the method described with reference to Figures 4 and 5. Any signals and information found in the scans are detected by the digital filter 30 which in turn signals the presence of data signals to the control element 35 which in response thereto changes over the switches 33, 37 and 44. The

signal and/or information is decoded in a MODEM 46 and the message information is supplied to the control element 35.

If a secondary station SS wishes to "converse" with the primary station in response to the received invitation signal, the control element 35 causes a suitable response message to be generated and be sent to the MODEM 46 by way of the switch 44. The modulated output from the MODEM 46 is supplied to the transmitter 24 by way of the switch 33. The transmitter 24 transmits the response on the reverse physical channel of the duplex voice channel used by the primary station when sending the invitation message.

The remainder of the message exchange takes place under the direction of the control element 35 which has been preprogrammed to carry out the sequence of operations mentioned above.

The structure and operation of a primary station generally resembles that of the secondary station shown in Figure 6. However, because the primary station is essentially a relay station interconnecting the PSTN to the secondary station by way of an air interface, it does not require a microphone, loudspeaker and keypad. Further a primary station normally transmits on at least one physical channel per frame and receives on multiple physical channels per frame.

For the sake of completeness Figure 7 illustrates a flow chart of the operations carried out by the control element of an idle station when scanning non-adjacent carrier channels. In the interests of brevity the scanning sequence will comprise the odd numbered carrier channels, a delay, and then the even numbered carrier channels. However the flow chart may readily be altered to accommodate other scanning sequences.

The flow chart starts with the block 50 which indicates the idle secondary station waiting for a predetermined time. At the expiry of the predetermined period, the scan of the odd numbered carrier channels takes place which operation is indicated by the block 52. A decision stage 54 indicates the detection or otherwise of signals in the physical channels which were scanned. Whenever an idle beacon or some other signal is detected, output Y, it is analysed as indicated by the block 56. If no signals are detected, output N, then the flow chart proceeds to a waiting stage, block 58. The described operations are then repeated except that the even numbered carrier channels are scanned, block 60, and the detection of a signal is detected by a decision stage 62. A negative output (N) from the decision stage 62 cause the process to return to wait, namely the block 50.

When sampling the physical channels for a fraction of their duration it is possible for the scanning sequence to comprise all the carrier channels

since an improved power consumption can be achieved as each physical channel is monitored for about one eighth of its duration (416 $\mu$ S).

In another variant for the present invention to speed up the locking of a secondary station on to its system, a secondary station can build up a list of identities of neighbouring systems and their primary stations and as it approaches its home base station it recognises that it is passing through the coverage areas of the neighbouring systems and can speed up its scanning of the carrier channels in anticipation of locking to its system with the minimum of delay.

In a typical situation in a residential environment, when a secondary station wanders out of range of its own primary station, it will probably search around to see if there is any other physical channel on which it can receive that primary station. During this search the primary station may receive signals from other systems. These signals contain the identities of neighbouring systems, and the primary station identity. The control element of the secondary station can arrange for these system identities to be stored, and if, on one of its infrequent searches, it finds one of its neighbouring systems, then it can increase its search rate in anticipation of quickly picking up its home system on the assumption that it is travelling towards its home coverage area.

For convenience of description, the present invention has been described with reference to DECT. However, the method in accordance with the present invention may be used in other suitable systems.

From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other features which are already known in the design, manufacture and use of digital cordless telephone systems and devices and component parts thereof and which may be used instead of or in addition to features already described herein. Although claims have been formulated in this application to particular combinations of features, it should be understood that the scope of the disclosure of the present combination of features disclosed herein either explicitly or implicitly or any generalisation thereof, whether or not it relates to the same invention as presently claimed in any claim and whether or not it mitigates any or all of the same technical problems as does the present invention. The applicants hereby give notice that new claims may be formulated to such features and/or combinations of such features during the prosecution of the present application or of any further application derived therefrom.

**Claims**

1. A method of operating a communications system which comprises a primary station and a plurality of secondary stations, communication between the primary and secondary stations being in accordance with a time division multiplex protocol in which each of a plurality of carrier channels is divided into time frames and each frame is divided into a plurality of physical channels, wherein an out of lock secondary station is powered up to scan periodically the physical channels in the or each carrier channel in order to detect those physical channels in which transmissions are taking place, characterised in that the scanning sequence of the secondary station is controlled so that during any one scan of the sequence consecutive physical channels which are located in non-adjacent carrier channels are scanned.
 

5  
10  
15  
20
2. A communications system comprising a primary station and a plurality of secondary stations, communication between the primary and secondary stations being in accordance with a time division multiplex protocol in which each of a plurality of carrier channels is divided into time frames and each frame is divided into a plurality of physical channels, wherein an out of lock secondary station is powered up to scan periodically the physical channels in each carrier channel in order to detect those physical channels in which transmissions are taking place, characterised in that the secondary station comprises control means for controlling the scanning sequence so that during any one scan of the sequence consecutive physical channels which are located in non-adjacent carrier channels are scanned.
 

25  
30  
35  
40
3. A secondary station for use in a communications system of a type as claimed in claim 2, the secondary station comprising transmitting and receiving means, control means for controlling the transmitting and receiving means, said control means being responsive to the secondary station being out of lock to initiate scanning of all the available physical channels in the respective carrier channels, characterised in that the scanning sequence is controlled so that during any one scan of the sequence consecutive physical channels which are located in non-adjacent carrier channels are scanned.
 

45  
50  
55
4. A secondary station as claimed in claim 3, characterised in that all the physical channels in a frame are scanned.
 

5
5. A secondary station as claimed in claim 3, characterised in that during any one scanning sequence only consecutive forward or consecutive reverse physical channels in a frame are scanned.
 

10
6. A secondary station as claimed in claim 3, 4 or 5, characterised in that substantially the entire duration of a physical channel is monitored during each scanning operation.
 


15
7. A secondary station as claimed in claim 3, 4 or 5, characterised in that the signal strength of a fraction of the duration of a physical channel is monitored during each scanning operation.
 

20
8. A secondary station as claimed in any one of claims 3 to 7, wherein the secondary stations include means for detecting each primary station's system code and means for storing its own system code, characterised in that the secondary station includes means for dynamically building up a record of neighbouring systems encountered when roaming outside the coverage area of its own system, and in that the scanning sequence is changed when a secondary station passes through the coverage areas of neighbouring systems in a direction towards the coverage area of its own system.
 


25  
30  
35  
40
9. A system as claimed in claim 8, characterised in that the rate of scanning is increased as a secondary station approaches the coverage area of its own system.
 

45  
50  
55

*Fig. 1.*

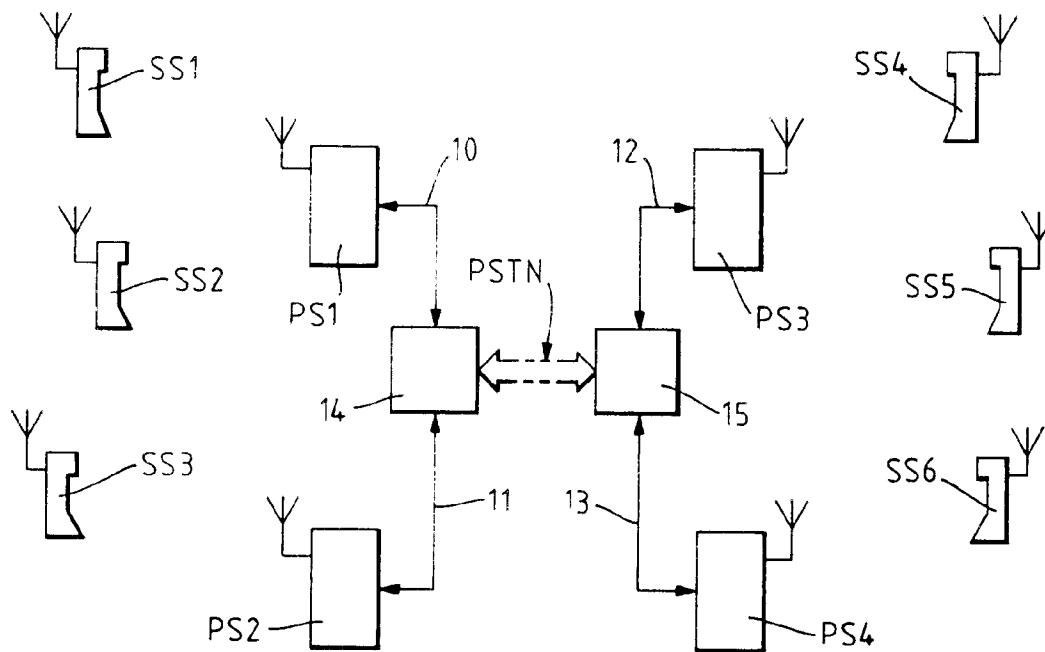



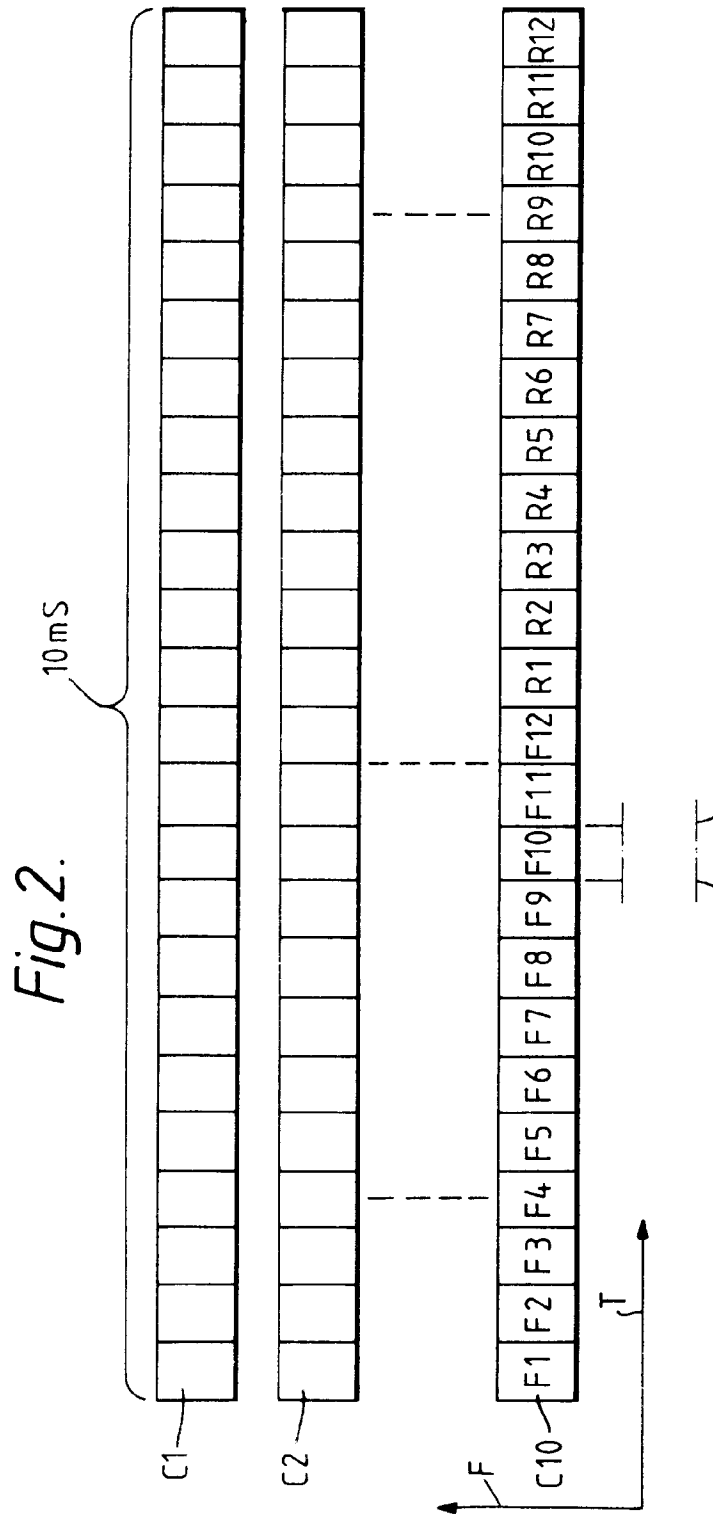

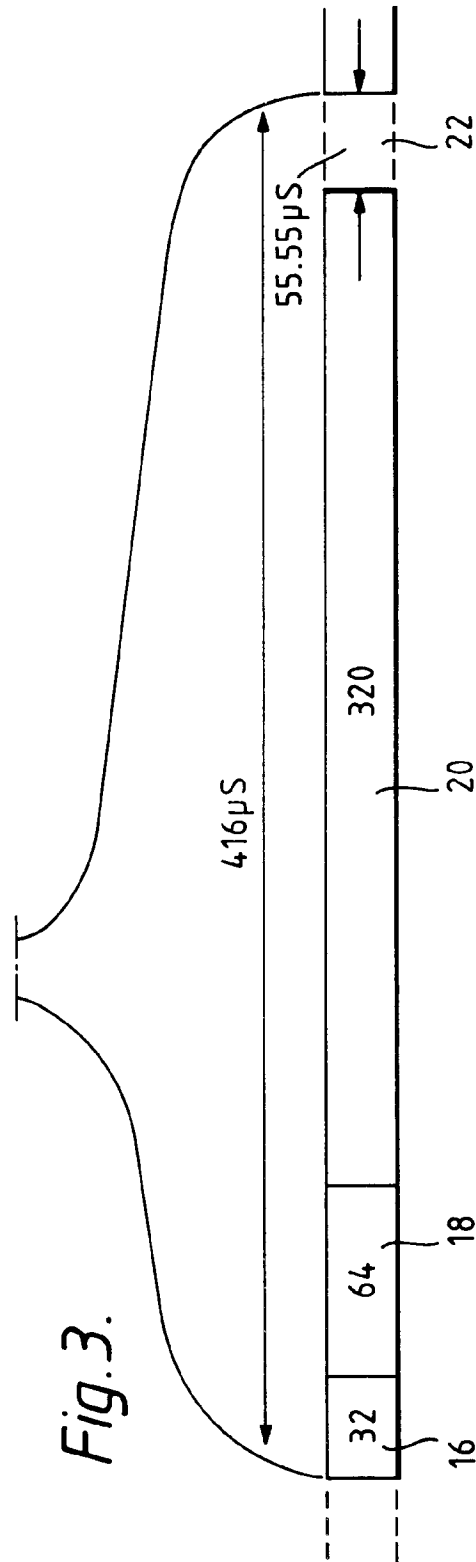


Fig. 4.

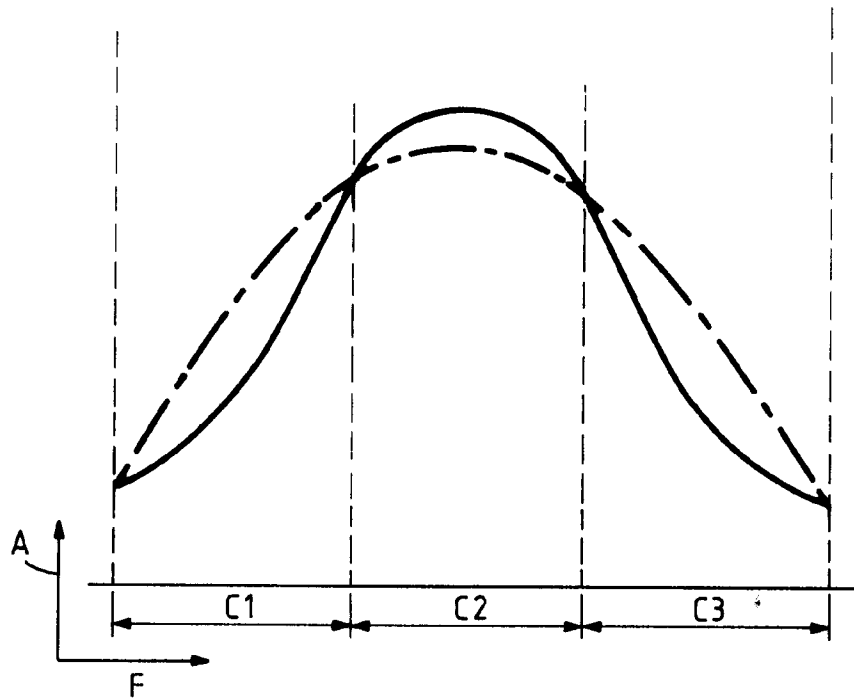


Fig. 5.


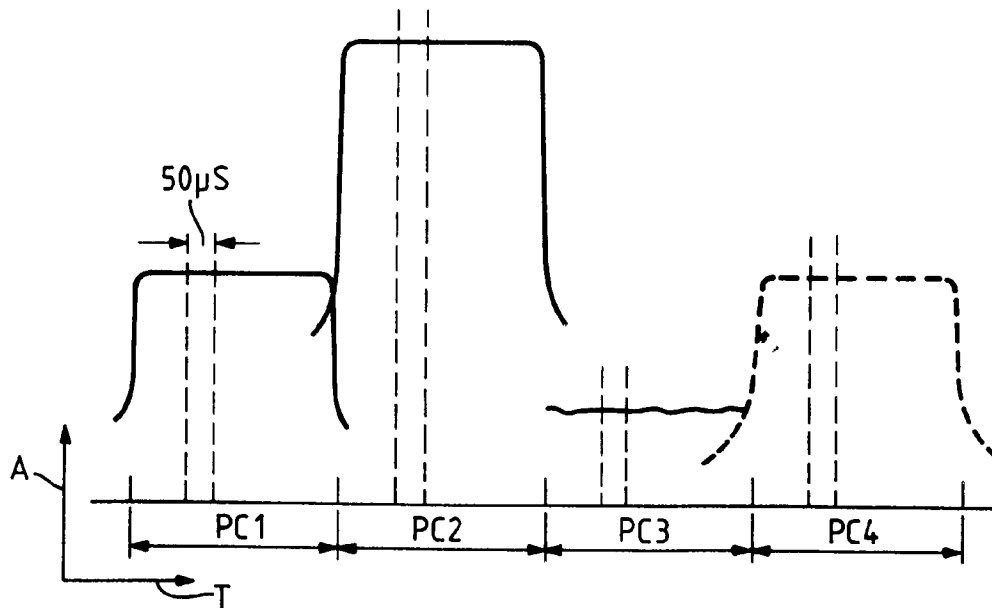


Fig. 6.



*Fig. 7.*

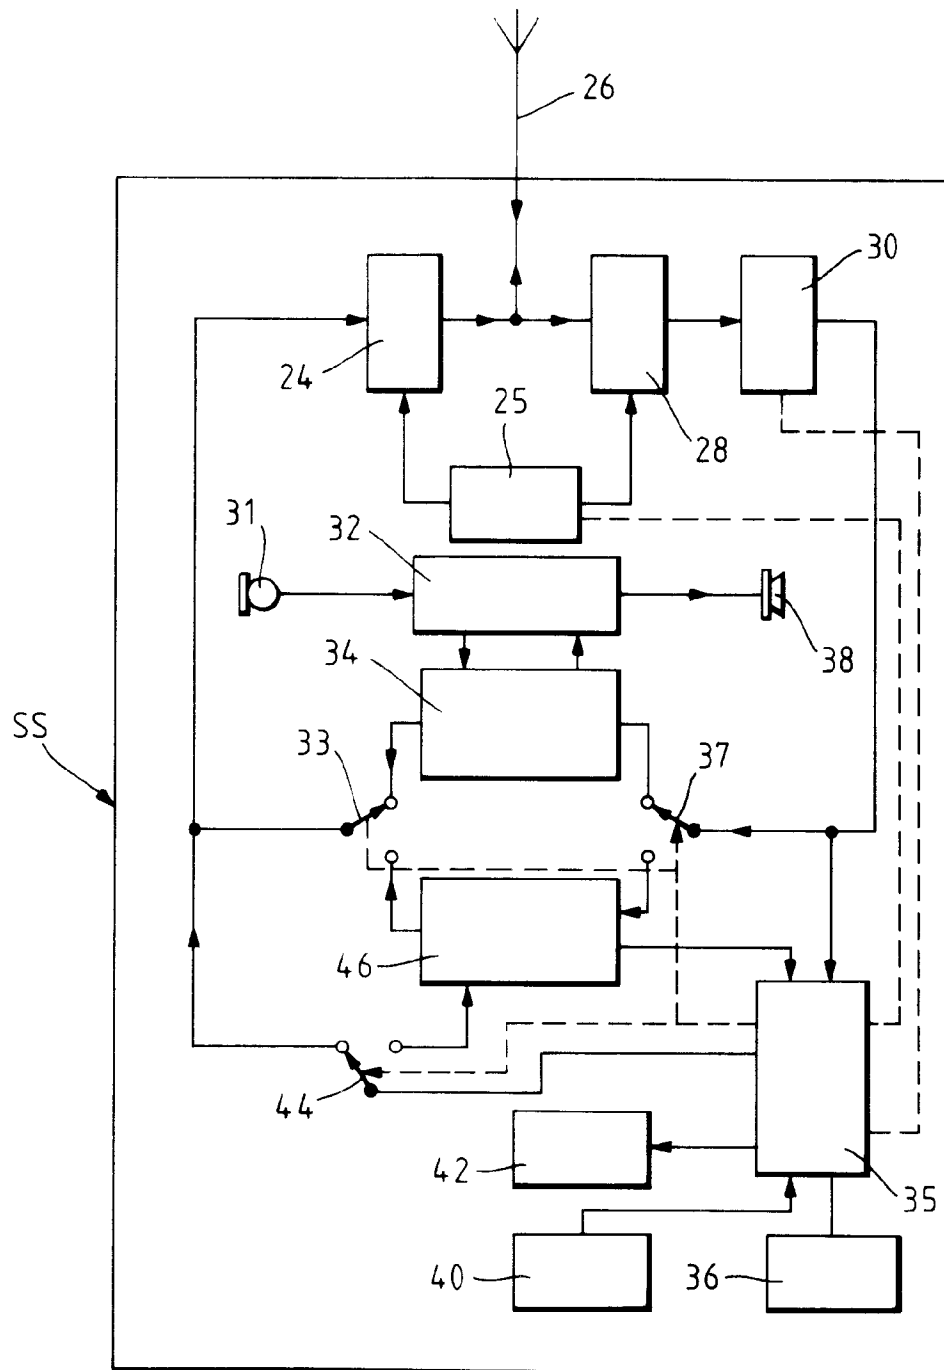